



SPLIT

NEW

## Wall-mounted type Standard Series

High-Efficiency & Large Rooms



Model: ASYG18KMTE/ASYG24KMTE



Wireless RC



For ASYG18KMTE



For ASYG24KMTE

### Specifications

Model name	Indoor unit		Outdoor unit		ASYG18KMTE		ASYG24KMTE	
					AOYG18KMTA		AOYG24KMTA	
Power Source	Single phase, ~230 V, 50 Hz							
Capacity	Cooling		kW		5.2 (0.9-6.0)		7.1 (0.9-8.3)	
	Heating		kW		6.3 (0.9-8.7)		8.0 (0.9-10.1)	
Input Power	Cooling/Heating		kW		1.39/1.56		2.08/1.91	
	Cooling		W/W		3.74		3.41	
EER	Cooling		W/W		4.04		4.19	
	Heating		W/W		5.2/4.8		7.1/7.1	
Pdesign	Cooling/Heating (-10°C)		kW		7.77		7.30	
	Cooling		W/W		4.60		4.20	
SEER	Heating (Average)		A++		A++		A++	
	Cooling		A++		A++		A++	
Energy Efficiency Class	Heating (Average)		A+		A+		A+	
	Cooling/Heating		A		9.5/13.5		13.5/16.0	
Max. Operating Current	Cooling/Heating		A		234		341	
	Cooling		kWh/a		1,472		2,372	
Annual Energy Consumption	Cooling		kWh/a		1.7		2.7	
	Heating		kWh/a		45/40/35/29		49/40/35/29	
Moisture Removal	Indoor (Cooling)	H/M/L/Q			46/40/35/29		49/40/35/29	
	Indoor (Heating)	H/M/L/Q			50/50		54/52	
Sound Pressure Level	Outdoor (Cooling/Heating)	High	dB(A)		60/61		65/65	
	Indoor (Cooling/Heating)	High	dB(A)		65/65		67/65	
Sound Power Level	Outdoor (Cooling/Heating)	High	dB(A)		980/2,350		1,170/3,240	
	Indoor/Outdoor (Cooling)	High	m³/h		1,020/2,100		1,170/2,820	
Airflow Rate	Indoor/Outdoor (Heating)	High	m³/h		280 × 980 × 240		280 × 980 × 240	
	Indoor		mm		632 × 799 × 290		716 × 820 × 315	
Net Dimensions H x W x D	Indoor		kg (lbs)		12.5 (28)		12.5 (28)	
	Outdoor		kg (lbs)		36 (79)		42 (93)	
Weight	Indoor		mm		6.35/12.70		6.35/12.70	
	Outdoor		mm		13.8/15.8 to 16.7		13.8/15.8 to 16.7	
Connection Pipe Diameter (Liquid/Gas)	Indoor		m		25 (15)		30 (15)	
	Outdoor		m		20		25	
Drain Hose Diameter (I.D./O.D.)	Cooling		°CDB		-10 to 46		-10 to 46	
	Heating		°CDB		-15 to 24		-15 to 24	
Operating Range	Cooling		°CDB		R32 (675)		R32 (675)	
	Heating		kg (CO2eq-T)		1.02 (0.689)		1.32 (0.891)	
Refrigerant	Type (Global Warming Potential)		kg (CO2eq-T)		1.02 (0.689)		1.32 (0.891)	
	Charge		kg (CO2eq-T)		1.02 (0.689)		1.32 (0.891)	

### High energy saving

Top class high efficiency is achieved by high efficient lamda heat exchanger, large cross flow fan and new refrigerant.




SEER 7.7<sup>\*1</sup>

\*18 model


SCOP 4.6<sup>\*1</sup>

\*18, 24 models

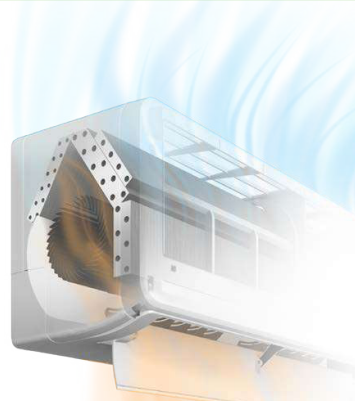

#### Hybrid-heat exchanger

The large hybrid heat exchanger has greatly improved the heat exchange efficiency to achieve top-level SEER and SCOP.



#### Ø107 Large cross-flow fan

The large-diameter fan generates air volume efficiently even at reduced power.



### Smart Device control (Option)

With the optional WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device. WLAN adapter can be installed easily without specialized installation work.

You need to install the FGLair app on your smart device in order to control the air conditioner.



### Easy access to the flare pipe connection

Installation when left outlet piping is easier by removable under cover of the indoor unit chassis. Installation when center outlet piping is easier by design change of wall hook bracket.

